

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/114547 A1

(51) International Patent Classification⁷: **H04B 7/185**

(21) International Application Number:
PCT/NL2003/000463

(22) International Filing Date: 23 June 2003 (23.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **STICHT-
ING ASTRON** [NL/NL]; Oude Hoogeveensedijk 4,
NL-7991 PD Dwingeloo (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KEGEL, Jacobus,
Adrianus** [NL/NL]; De Tellinghorst 11, NL-7909 CG
HOOGEVEEN (NL).


(74) Agent: **PRINS, A.W.; NIEUWE PARKLAAN 97,
NL-2587 BN DEN HAAG** (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO,
RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD FOR OPTIMISING AT LEAST ONE PROPERTY OF A SATELLITE SYSTEM, OPTIMISATION DEVICE
FOR A SATELLITE SYSTEM, SATELLITE RECEIVER AND SATELLITE SYSTEM

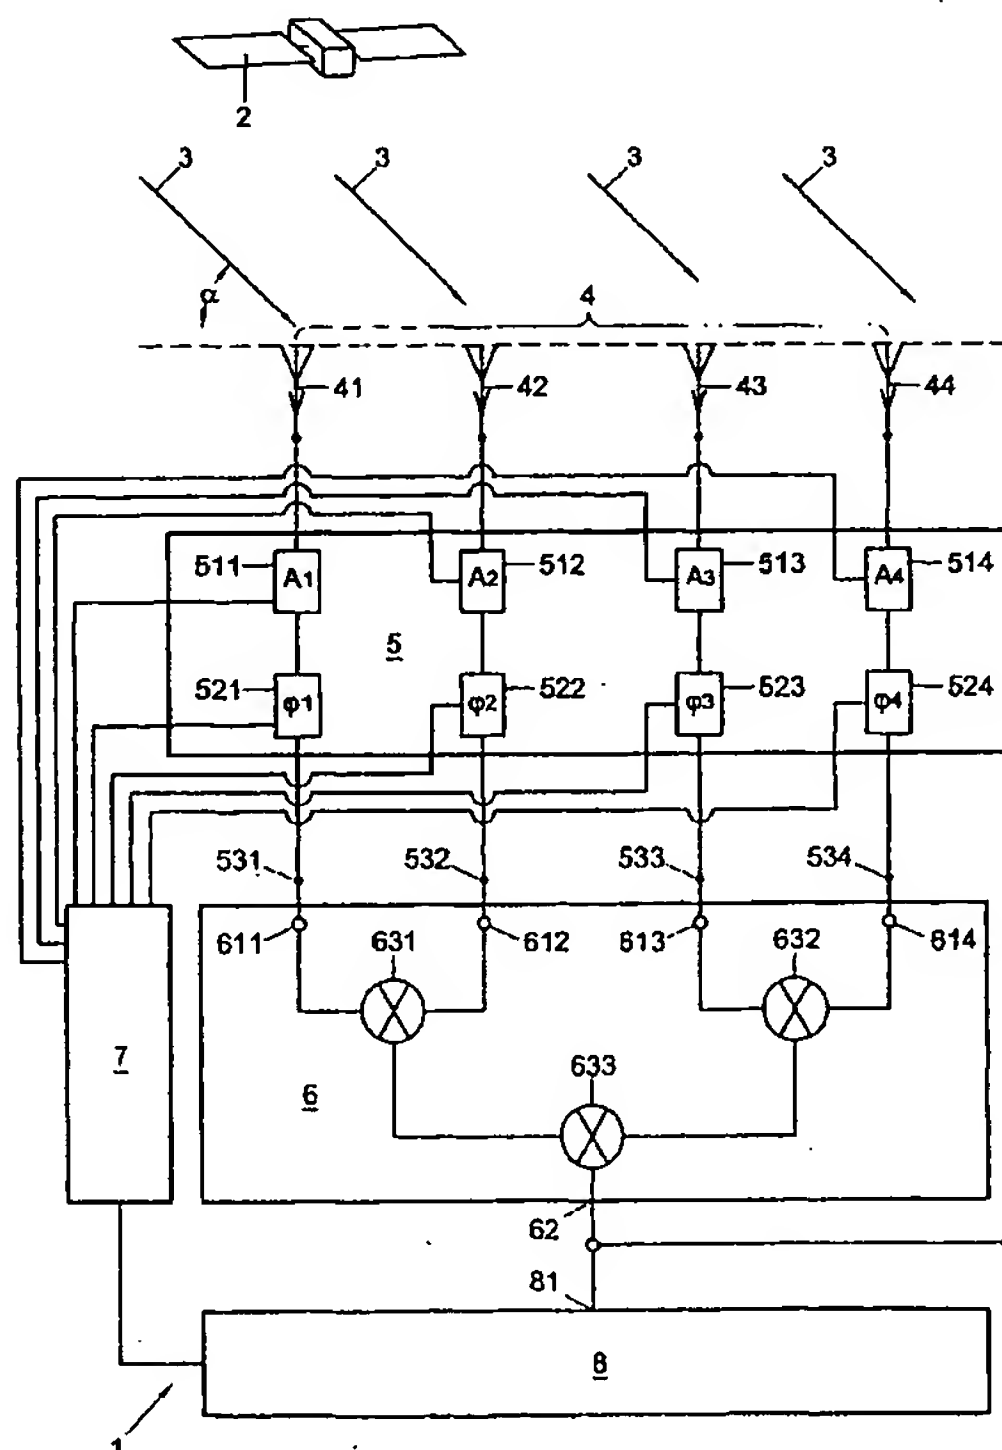

(57) Abstract: A method for optimising at least one prop-
erty of a satellite system. The satellite system comprises a satel-
lite provided with a transmitter for transmitting an satel-
lite signal which represents data. The satellite is further pro-
vided with a satellite receiver for receiving said satellite sig-
nal. The method comprises receiving at said satellite receiver
the satellite signal; determining from the satellite signal said
data; checking the data for data errors; and changing said at
least one property of the satellite system if a result of said
checking satisfies a predetermined criterion.

WO 2004/114547 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.